


Technische Änderungen vorbehalten
 Sous réserve de modification
 Technical improvements reserved

Montage – Platzbedarfsdiagramm

Montage – Surface utile

Montage – Space required diagram

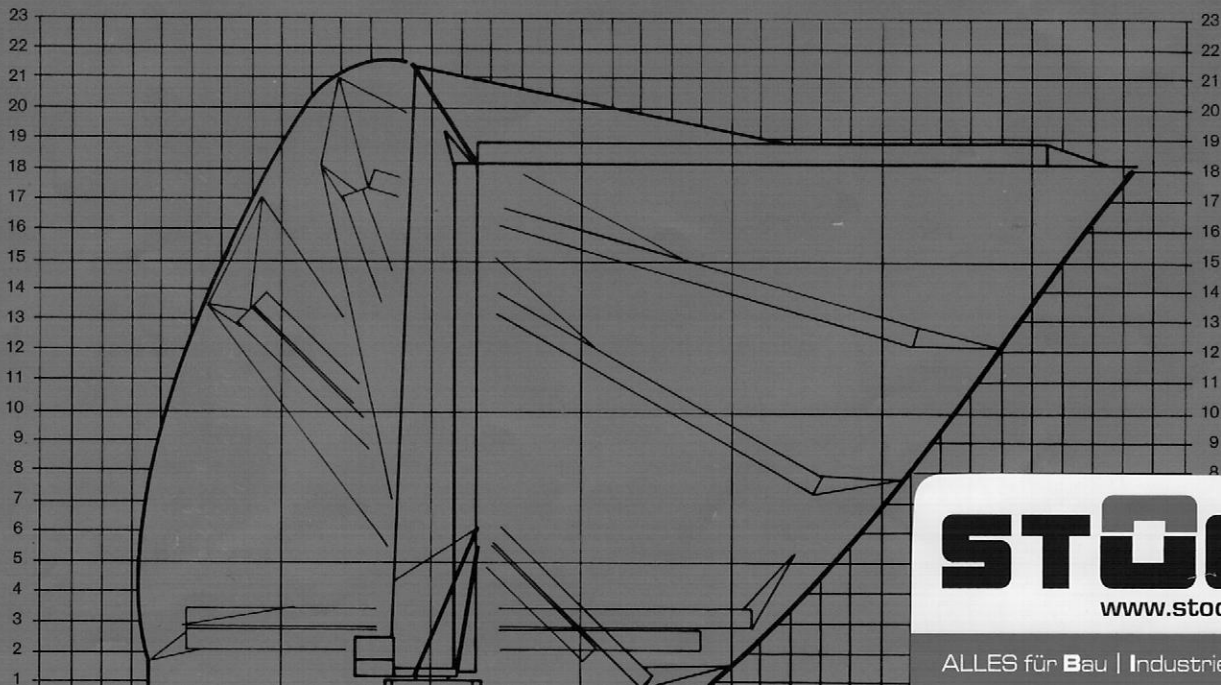

Leistungsdaten Details techniques Performance Data	Ausladung (m) Portée Radius	Tragkraft (kg) Capacité Lifting capacity	Max. Tragkraft (kg) Capacité max. Lifting capacity max.
	23	750	1500

Geschwindigkeiten Vitesses Speeds	Heben Levage Lifting					
			m/min.	kg	m/min.	kg
			45	750	—	—
			22	1500	—	—
		5	1500	—	—	
Katzfahren Chariotage / Trolley drive				m/min.	36	
Kranfahren Translation / Travelling				m/min.	30	
Drehen (stufenlos) Rotation / Slewing				U/min.	0,9	

STOCK
www.stock-big.com

ALLES für Bau | Industrie | Gewerbe
Miete | Service | Kauf

Hamburg Berlin Rostock
Fon +49 (0)4107 901-0 Fon +49 (0)30 983 047-0 Fon +49 (0)38204 708 0

Allgemeine technische Daten Details techniques généraux / General technical data					
Konstruktionsgewicht Poids de la grue / Weight	kg	6000	Ges. elektr. Leistung Puissance totale / Motor power	kW	10
Gegengewicht Contrepoids / Counter weight	kg	10000* (13000)	Kabelquerschnitt Section du câble / Cable section	380 V	4 x 6 □
Max. Eckdruck Pression max. / max. wheel load	kN	84	Kabeltrommel Enrouleur / Cable Drum	m	54
Spurweite Ecartement / Track gauge	m	3,0	Schienenprofil Profil du rail / Rail profile	S18-S24	
Radstand Voie / wheel gauge	m	3,0			
Drehradius Rayon de giration / Slewing radius	m	2,6 (1,6)	* Gegengewicht CH Contrepoids CH / Counter weight CH 11700 kg		

